

SQ-7

Supported SLink Connections Firmware V1.2.0

**SQ-7
+AR84**



— dSnake Cat5e or higher

- Total Input Sources: **47**
- Total Output Sockets: **22**
- Local Input Sources
Mic/Line: **32 + 1**
Line: **6**
- Remote Inputs
Mic/Line: **8**
- Local Output Sockets
XLR + TRS: **16 + 2**
- Remote Output Sockets
XLR: **4**

**SQ-7
+AB168**



— dSnake Cat5e or higher

- Total Input Sources: **55**
- Total Output Sockets: **26**
- Local Input Sources
Mic/Line: **32 + 1**
Line: **6**
- Remote Inputs
Mic/Line: **16**
- Local Output Sockets
XLR + TRS: **16 + 2**
- Remote Output Sockets
XLR: **8**
- + ME connection


**SQ-7
+AR2412**



— dSnake Cat5e or higher — ME Cat5e or higher

- Total Input Sources: **63**
- Total Output Sockets: **30**
- Local Input Sources
Mic/Line: **32 + 1**
Line: **6**
- Remote Inputs
Mic/Line: **24**
- Local Output Sockets
XLR + TRS: **16 + 2**
- Remote Output Sockets
XLR: **12**
- + ME connection

**SQ-7
+AB168
+AR84**

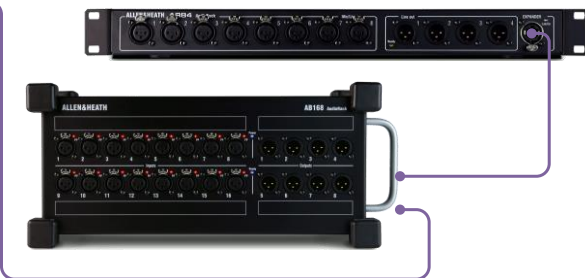

— dSnake Cat5e or higher

- Total Input Sources: **63**
- Total Output Sockets: **30**
- Local Input Sources
Mic/Line: **32 + 1**
Line: **6**
- Remote Inputs
Mic/Line: **24**
- Local Output Sockets
XLR + TRS: **16 + 2**
- Remote Output Sockets
XLR: **12**

**SQ-7
+AB168
+AB168**

ME PERSONAL MIXING SYSTEM

dSnake Cat5e or higher

Total Input Sources: **71**
 Total Output Sockets: **34**
 Local Input Sources
 Mic/Line: **32 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **32**
 Local Output Sockets
 XLR + TRS: **16 + 2**
 Remote Output Sockets
 XLR: **16**
 + ME connection

**SQ-7
+AR2412
+AB168**

ME PERSONAL MIXING SYSTEM

dSnake Cat5e or higher

Total Input Sources: **79**
 Total Output Sockets: **38**
 Local Input Sources
 Mic/Line: **32 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **40**
 Local Output Sockets
 XLR + TRS: **16 + 2**
 Remote Output Sockets
 XLR: **20**
 + ME connection

**SQ-7
+ ME**

ME PERSONAL MIXING SYSTEM

ME-U

ME-1 ME-500 ME-1 ME-500 ME-1

ME-U provides PoE to power ME-1 and ME-500 units

dSnake Cat5e or higher

Total Input Sources: **39**
 Total Output Sockets: **18**
 Local Input Sources
 Mic/Line: **32 + 1**
 Line: **6**
 Local Output Sockets
 XLR + TRS: **16 + 2**
 Channels to ME: **40**

**SQ-7
+ ME**

ME PERSONAL MIXING SYSTEM

ME-500 ME-500 ME-1 ME-500

ME-1 and ME-500 units must be powered separately

dSnake Cat5e or higher

Total Input Sources: **39**
 Total Output Sockets: **18**
 Local Input Sources
 Mic/Line: **32 + 1**
 Line: **6**
 Local Output Sockets
 XLR + TRS: **16 + 2**
 Channels to ME: **40**

**SQ-7
+ DX168
(96kHz)**



DX Cat5e or higher

Total Input Sources: **55**
 Total Output Sockets: **26**
 Local Input Sources
 Mic/Line: **32 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **16**
 Local Output Sockets
 XLR + TRS: **16 + 2**
 Remote Output Sockets
 XLR: **8**

**SQ-7
+ DX168
+ DX168
(96kHz)**




Use cascade mode for the first DX168 in the chain

DX Cat5e or higher

Total Input Sources: **71**
 Total Output Sockets: **34**
 Local Input Sources
 Mic/Line: **32 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **32**
 Local Output Sockets
 XLR + TRS: **16 + 2**
 Remote Output Sockets
 XLR: **16**

**SQ-7
+ DX Hub
+ 3 x DX168
(96kHz)**

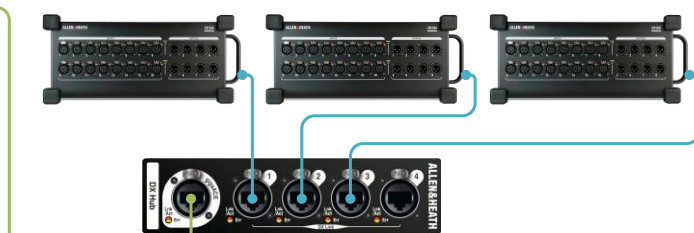


Up to 2 DX168s can be connected to each port using cascade mode

gigaACE Cat5e or higher
 DX Cat5e or higher

Total Input Sources: **87**
 Total Output Sockets: **42**
 Local Input Sources
 Mic/Line: **32 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **48**
 Local Output Sockets
 XLR + TRS: **16 + 2**
 Remote Output Sockets
 XLR: **24**

**SQ-7
+ DX Hub
+ 8 x DX168
(96kHz)**

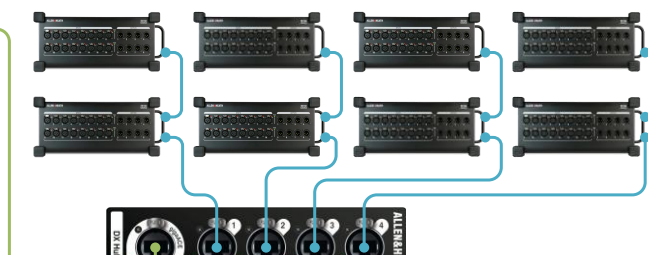

Up to 2 DX168s can be connected to each port using cascade mode

gigaACE Cat5e or higher
 DX Cat5e or higher

Total Input Sources: **167**
 Total Output Sockets: **82**
 Local Input Sources
 Mic/Line: **32 + 1**
 Line: **6**
 Remote Inputs
 Mic/Line: **128**
 Local Output Sockets
 XLR + TRS: **16 + 2**
 Remote Output Sockets
 XLR: **64**

**SQ-7
+Qu**



dSnake Cat5e or higher

Total Input Sources: **99**
 Total Outputs: **58**
 Local Input Sources
 Mic/Line: **32 + 1**
 Line: **6**
 Remote Inputs
 dSnake: **60**
 Local Output Sockets
 XLR + TRS: **16 + 2**
 Remote Outputs
 dSnake: **40**

**SQ-7
+SQ
(96kHz)**



GigaACE Cat5e or higher

Total Input Sources: **167**
 Total Outputs: **146**
 Local Input Sources
 Mic/Line: **32 + 1**
 Line: **6**
 Remote Inputs
 GigaACE: **128**
 Local Output Sockets
 XLR + TRS: **16 + 2**
 Remote Outputs
 GigaACE: **128**

**SQ-7
+dLive
(96kHz)**



GigaACE Cat5e or higher

Total Input Sources: **167**
 Total Outputs: **146**
 Local Input Sources
 Mic/Line: **32 + 1**
 Line: **6**
 Remote Inputs
 GigaACE: **128**
 Local Output Sockets
 XLR + TRS: **16 + 2**
 Remote Outputs
 GigaACE: **128**